

Distributed Voronoi Diagram Computation in Wireless Sensor Networks

Waleed Alsalih, Kamrul Islam, Yurai Núñez-Rodríguez, and Henry Xiao
School of Computing
Queen's University
Kingston, ON, Canada, K7L 3N6
waleed@cs.queensu.ca, islam@cs.queensu.ca, yurai@cs.queensu.ca,
xiao@cs.queensu.ca

ABSTRACT

We present a distributed algorithm to compute the Voronoi Diagram (VD) of a wireless network in the plane. Our contribution is twofold: the complete VD is computed, as opposed to the approximate or the bounded VD, and the number of transmissions used is relatively small.

Categories and Subject Descriptors: C.2.1 [Computer-Communication Networks]: Network Architecture and Design—*distributed networks, network topology*; F.2.2 [Analysis of Algorithms and Problem Complexity]: Nonnumerical Algorithms and Problems—*geometrical problems and computations*

General Terms: Algorithms, Experimentation, Theory

Keywords: Distributed Algorithms, Sensor Networks, Voronoi Diagrams

1. INTRODUCTION

Given a connected sensor network, where connectivity complies with the unit disk graph model, the Voronoi Diagram (VD) of the network is a partition of the plane such that each (sensor) node is assigned the set of points that are closer to itself than to any other node. We propose a distributed algorithm, Completely Cooperative (CC), for computing VD's. Among other non-trivial approaches, a recent algorithm by Bash and Desnoyers (BD07) [1] computes the best approximation of the VD (VD of a bounded region). The CC algorithm offers two main advantages over their approach: (1) no region boundary is required, therefore, the VD of the entire plane is computed; (2) the CC algorithm uses less communication (see the experimental results in Figure 1). Moreover, the CC algorithm can compute the Delaunay triangulation and the convex hull of the set of nodes.

2. THE CC ALGORITHM

The following is a description of the CC algorithm in its simplest form. The CC algorithm runs at each node, which makes it distributed. The node itself is referred to as *this*. Each node is equipped with information about its *location*, the current approximation to the Voronoi *cell* being computed, and a message *queue*. A message contains informa-

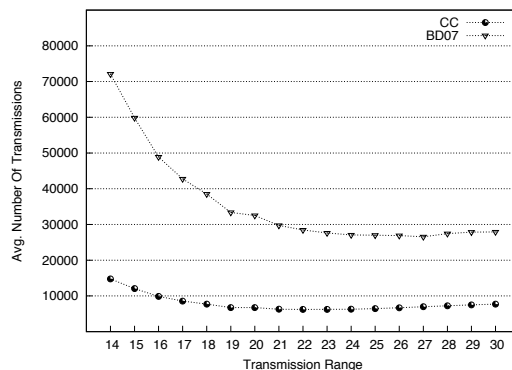


Figure 1: Number of transmissions of CC vs. BD07

tion about a node's location. At each iteration a node's cell is *refined*, i.e., reduced to its intersection with the halfplane defined by the bisector between the node and the neighbour in question. If the refinement produces a smaller cell, the node notifies the other involved neighbours about each other.

```
Set this.cell = ENTIRE_PLANE
Broadcast this.location to all neighbours
While there exists message m in this.queue
  Refine this.cell with respect to m.location
  For each new vertex v in cell boundary
    Send message to m.node about the third node involved in v
    Send message to the third node involved in v about m.node
  end
end
```

THEOREM 1. *The CC algorithm correctly computes the VD of a sensor network as defined above.*

3. EXPERIMENTAL RESULTS

The testsets consist of 100 nodes randomly placed in a 100×100 unit grid. We test transmission ranges from 14 to 30 units at increments of 1. Opaque obstacles are also included to make the scenario more realistic. For each transmission range 1000 topologies are generated and the two algorithms, CC and BD07, are run. The results are shown in Figure 1.

4. REFERENCES

- [1] B. A. Bash and P. J. Desnoyers. Exact distributed Voronoi cell computation in sensor networks. In *Proc. of IPSN'07*, pp. 236–243, NY, USA, 2007.